


CB-Series

Hi-Feed Counterbores

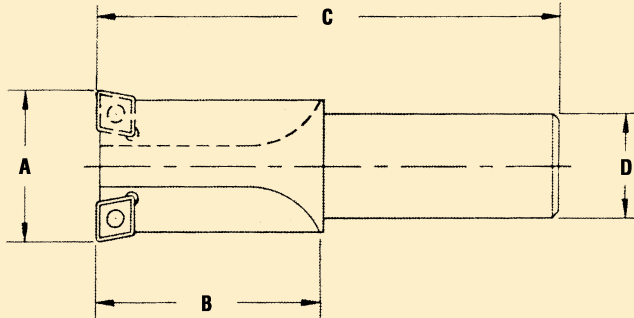

Diameter (A)	Catalog Number	Flute Length (B)	OAL (C)	Shank (D)	Min. Hole Size	Insert Size	No. of Inserts	Insert	Screw
.625"	CB-ISR-.625-CN2-0-3(2)	1.13"	3.38"	.75"	.137"	1/4" I.C.	2	CCMT-21.52	TX-2545-20
.687"	CB-ISR-.687-CN2-0-3(2)				.199"				
.750"	CB-ISR-.75-CN2-0-3(2)				.262"				
.812"	CB-ISR-.812-CN2-0-3(2)				.324"				
.875"	CB-ISR-.875-CN2-0-3(2)				.386"				
.937"	CB-ISR-.937-CN2-0-3(2)				.448"				
1.00"	CB-ISR-1.0-CN3-0-3(2)	1.25"	3.5"	1.00"	.300"	3/8" I.C.	2	CCMT-32.52	TX-4007-37
1.062"	CB-ISR-1.062-CN3-0-3(2)	.362"							
1.125"	CB-ISR-1.125-CN3-0-3(2)	.425"							
1.187"	CB-ISR-1.187-CN3-0-3(2)	.497"							
1.25"	CB-ISR-1.25-CN3-0-4(2)	.550"							
1.312"	CB-ISR-1.312-CN3-0-4(2)	.612"							
1.375"	CB-ISR-1.375-CN3-0-4(2)	2"	4.25"	1.25"	.675"	3/8" I.C.	2	CCMT-32.52	TX-4007-37
1.437"	CB-ISR-1.437-CN3-0-4(2)	.737"							
1.50"	CB-ISR-1.50-CN3-0-5(2)	2.25"	4.5"		.800"				
1.562"	CB-ISR-1.562-CN3-0-5(2)	.862"							
1.625"	CB-ISR-1.625-CN3-0-5(2)	.925"							
1.687"	CB-ISR-1.687-CN3-0-5(2)	.987"							
1.75"	CB-ISR-1.75-CN3-0-5(2)	3"	5.25"	1.50"	1.05"	3/8" I.C.	2	CCMT-32.52	TX-4007-37
1.812"	CB-ISR-1.812-CN3-0-6(2)	3.75"	6"		1.112"				
1.875"	CB-ISR-1.875-CN3-0-6(2)	4"	6.25"		1.175"				
1.937"	CB-ISR-1.937-CN3-0-6(2)	4.75"	7"		1.237"				
2.00"	CB-ISR-2.0-CN3-0-6(2)	5"	7.25"		1.300"				
2.062"	CB-ISR-2.062-CN3-0-6(2)	4.75"	7"		1.362"				
2.125"	CB-ISR-2.125-CN3-0-6(2)	5"	7.25"	1.50"	1.425"	3/8" I.C.	2	CCMT-32.52	TX-4007-37
2.187"	CB-ISR-2.187-CN3-0-6(2)	5"	7.25"		1.487"				
2.25"	CB-ISR-2.25-CN3-0-6(2)	5"	7.25"		1.550"				

Special Sizes and Metrics Available

- *Piloted tools available*
- *Coolant fed available*
- *We can diamond tip our inserts for non-ferrous material applications*

