


L-Series

Extended Depth Endmills

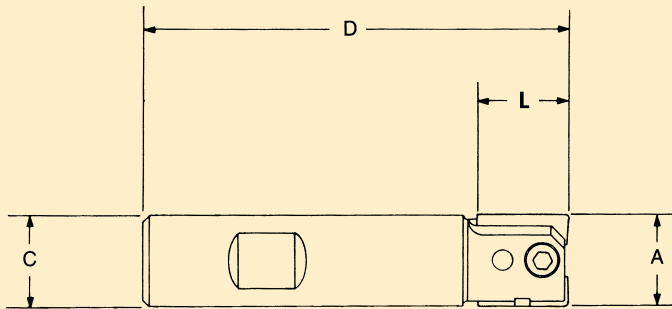

Cut Diameter (A)	Catalog Number	Depth of Cut (L)	Shank (C)	OAL (D)	Inserts	Head Screws	
.500"	L-IPR-.50-LB3-0-2(1)	.75"	.50"	3.50"	L1X32_ (1 req.)*	4403	
.625"	L-IPR-.625-LB3-0-3(2)		.75"		.75"	L1X32_*	6323
.750"	L-IPR-.75-LB3-0-3(2)						8324
.875"	L-IPR-.875-LB3-0-3(2)						10244
1.00"	L-IPR-1.00-LB3-0-3(2)						10245
1.25"	L-IPR-1.25-LB3-0-3(2)						10248
1.00"	L-IPR-1-LB5-0-4(2)	1.25"	1.00"	4.00"	L1X52_*	10245 (3 req.)	
1.25"	L-IPR-1.25-LB5-0-4(2)					10248 (3 req.)	

*See page 30 for proper radius.

- Helpful for milling in deeper cavities
 - Good for steel and aluminum
 - PCD tipped inserts available

