



# LD-Series

## 0° Lead Angled Endmills

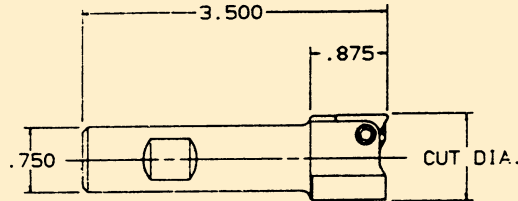

Catalog #	Cut Dia.	Lead Angle	Insert	# Req.	Screw	# Req	Shank			
LD-IPR-.75-TP2-0-3(2)	.750"	0	TPG-222	2	S-1032-1.5C	2	Weldon			
LD-IPR-.875-TP2-0-3(2)	.875"				S-1032-1.5C					
LD-IPR-1.00-TP3-0-3(2)	1"				S-2528-2C					
LD-IPR-1.25-TP3-0-3(2)	1.25"				S-2528-2C					
LD-IPR-1.50-TP3-0-3(3)	1.50"		TPG-322	3	S-2528-2C	3				
LD-IPR-1.75-TP3-0-3(3)	1.75"				S-2528-2C					
LD-IPR-2.00-TP3-0-3(3)	2"				S-2528-2C					
LD-IPR-2.00-TP3-0-R8(3)					S-2528-2C			R8		
LD-IPR-2.00-TP3-0-3(5)					5			S-2528-2C	5	Weldon
LD-IPR-2.00-TP3-0-R8(5)								S-2528-2C		R8

## Lead Angled Endmills

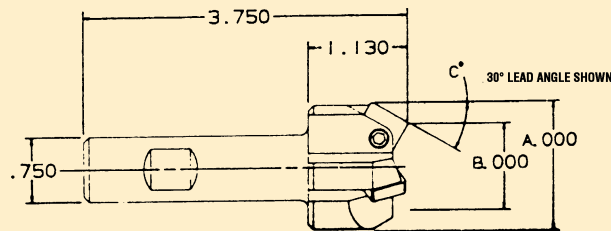

	Catalog #	Major Dia 'A'	Minor Dia 'B'	Lead Angle 'C'	Insert	# Req.	Screw	# Req.
15° Lead	LD-IPR-1.00-TP3-15-3(2)	1"	.775"	15-deg.	SPG-322	2	S-2528-2C	2
	LD-IPR-1.25-TP4-15-3(2)	1.25"	.961"	15-deg.	SPG-422	2	S-2528-2C	2
	LD-IPR-1.50-TP4-15-3(3)	1.50"	1.21"	15-deg.	SPG-422	3	S-2528-3C	3
30° Lead	LD-IPR-1.00-TP3-30-3(2)	1"	.625"	30-deg.	SPG-322	2	S-2528-2C	2
	LD-IPR-1.25-TP4-30-3(2)	1.25"	.750"	30-deg.	SPG-422	2	S-2528-2C	2
	LD-IPR-1.50-TP4-30-3(3)	1.50"	1"	30-deg.	SPG-422	3	S-2528-3C	3
45° Lead	LD-IPR-1.00-TP3-45-3(2)	1"	.526"	45-deg.	SPG-322	2	S-2528-2C	2
	LD-IPR-1.25-TP4-45-3(2)	1.25"	.569"	45-deg.	SPG-422	2	S-2528-2C	2
	LD-IPR-1.50-TP4-45-3(3)	1.50"	.819"	45-deg.	SPG-422	3	S-2528-3C	3
60° Lead	LD-IPR-1.00-TP3-60-3(2)	1"	.396"	60-deg.	SPG-322	2	S-2528-2C	2
	LD-IPR-1.25-TP4-60-3(2)	1.25"	.430"	60-deg.	SPG-422	2	S-2528-2C	2
	LD-IPR-1.50-TP4-60-3(3)	1.50"	.680"	60-deg.	SPG-422	3	S-2528-3C	3

